


4" MIN. LIMEROCK CURB PAD
COMPACTED TO 98% MAX. DENSITY
PER AASHTO T-180, LBR 100

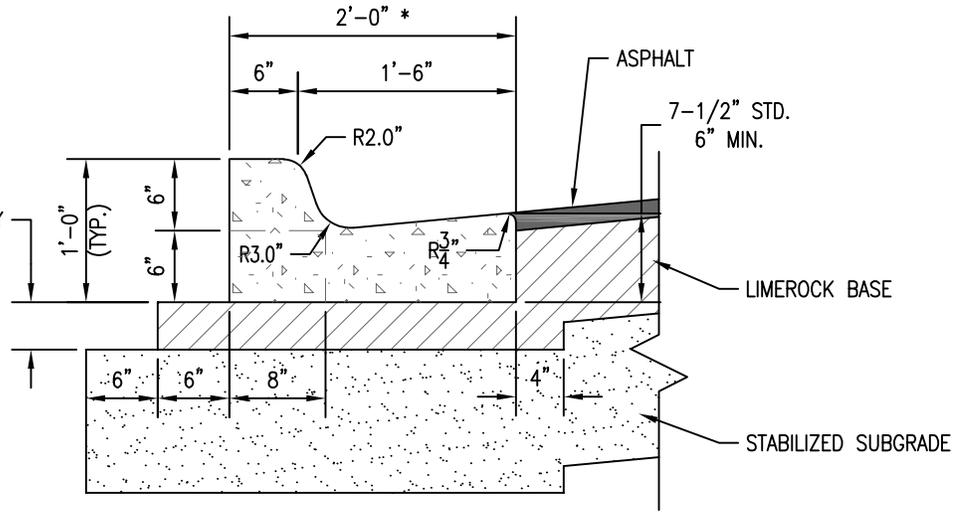


NOTE:


TYPE "F"

(*) WHEN USED ON HIGH OF ROADWAYS, THE CROSS SLOPE OF THE GUTTER SHALL MATCH THE CROSS SLOPE OF THE ADJACENT PAVEMENT AND THE THICKNESS OF THE LIP SHALL BE 6". UNLESS OTHERWISE SHOWN ON PLANS.


4" MIN. LIMEROCK CURB PAD
COMPACTED TO 98% MAX. DENSITY
PER AASHTO T-180, LBR 100

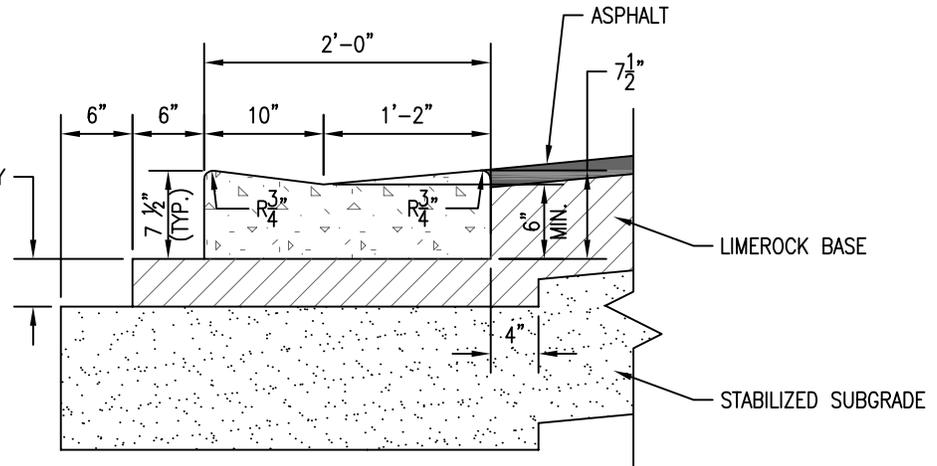

VALLEY GUTTER

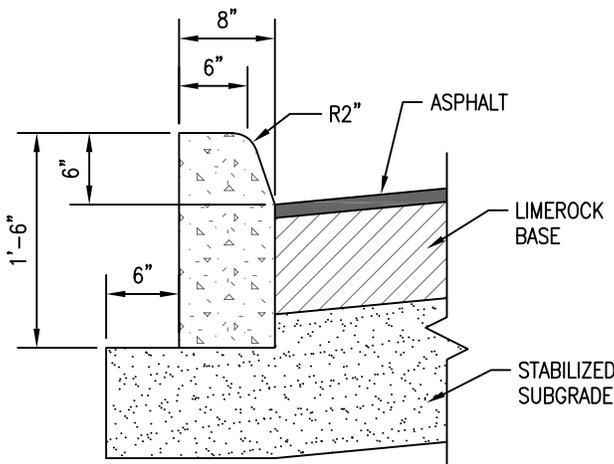

TYPE "D" CURB

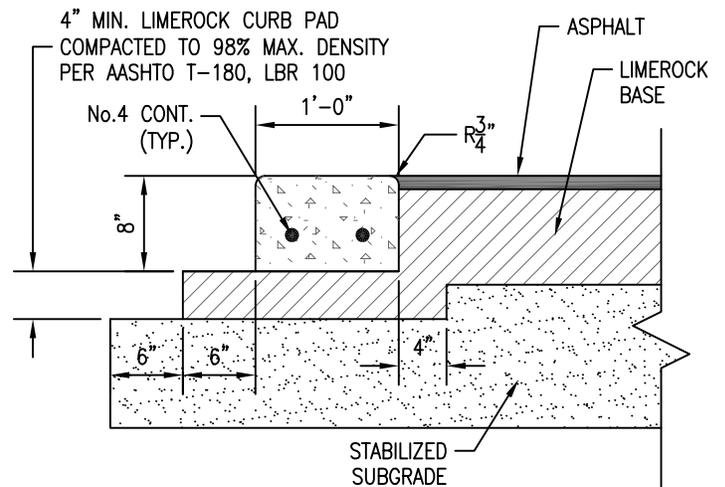

HEADER CURB

NOTE:

MINIMUM COMPRESSIVE STRENGTH OF CONCRETE FOR ALL CURB TYPES SHALL BE 3,500 PSI.

CITY OF PEMBROKE PINES
ENGINEERING/UTILITIES DIVISION

STANDARD ROAD DETAIL


APPROVED: J.M.

REVISED:

DATE: 11/05/99

10/20/22

CONCRETE CURBS



R-26